

Technical Data Sheet

TECHNIPOL® 170/G

DESCRIPTION


TECHNIPOL® 170/G is a co-polyester based thermoplastic adhesive designed for the production of oil and diesel filters in the automotive industry. TECHNIPOL® 170/G is characterised by a high chemical resistance (mineral oil and diesel vapours) and by a good thermal resistance.

TECHNICAL CHARACTERISTICS

PROPERTY	TEST METHOD	M.U.	VALUE	
Density	ISO 1183	g/cm ³	1,27	
Melting temperature	ISO 11357-3	°C	170	
Elongation at break	ISO 527	%	> 500	
MFI	210°C - 0,325Kg	ISO 1133	g/10 min	40
Viscosity Brookfield	210°C	MI 12	Pa*s	36

Cone/ plate Viscometer, Model Brookfield CAP 2000+.

VISCOSITY vs TEMPERATURE CURVE

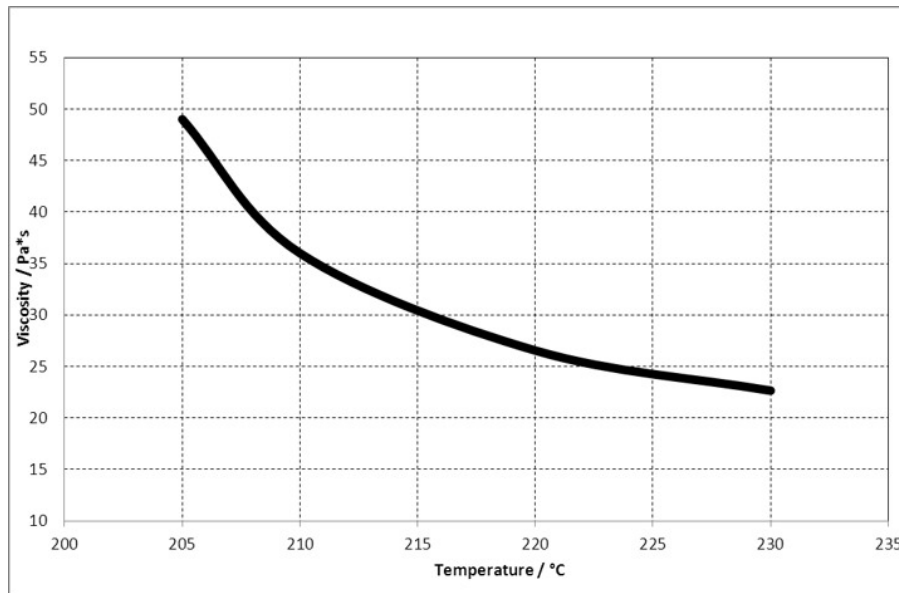

Technical Data Sheet

TECHNIPOL® 170/G

PROCESSING CONDITIONS

Suggested temperature profile for extrusion

UNDER HOPPER	FEEDING ZONE	COMPRESSION ZONE	METERING ZONE	EXTRUSION DIE/ HOSE	NOZZLE
60-80 °C	120-150 °C	170-190 °C	180-210 °C	200-220 °C	200-220 °C

Suggested temperature profile for melters

PRE-HEATING GRID	TANK	HOSE	NOZZLE
180-190 °C	210-220 °C	220-230 °C	220-230 °C

PACKAGING

25 kg bags equipped with an aluminum film barrier against moisture action.
500 kg cardboard octabins equipped with an inner PE liner.
500 Kg and 1000 Kg big bags.

STORAGE

Product is stable for 12 months when stored unopened in its original packaging, kept in a cool and dry place and protected from light. When stocked around 5 – 10°C or below, it is recommended to keep it at 15 – 20°C for at least for 24 hours before using it.